

FS 127

Grid 1,27
Spring travel 6,35 mm

Technical Data

Minimum grid distance:	1,27 mm
Maximum spring travel:	6,35 mm
Recommended lifting height:	80%
Spring force at 4/5 spring travel:	1,0, 1,5, 2,0 N
E-value (collar height) defines the installation height	0,0 mm
Rated current:	2 -3 A
Contact resistance:	20 mΩ
Pin housing:	Bronze, gold-plated
Barrel:	BeCu, gold-plated
Spring:	Steel, gold-plated or Stainless Steel
Piston:	Steel or BeCu, gold-plated

Receptacles

SH-127 00 W

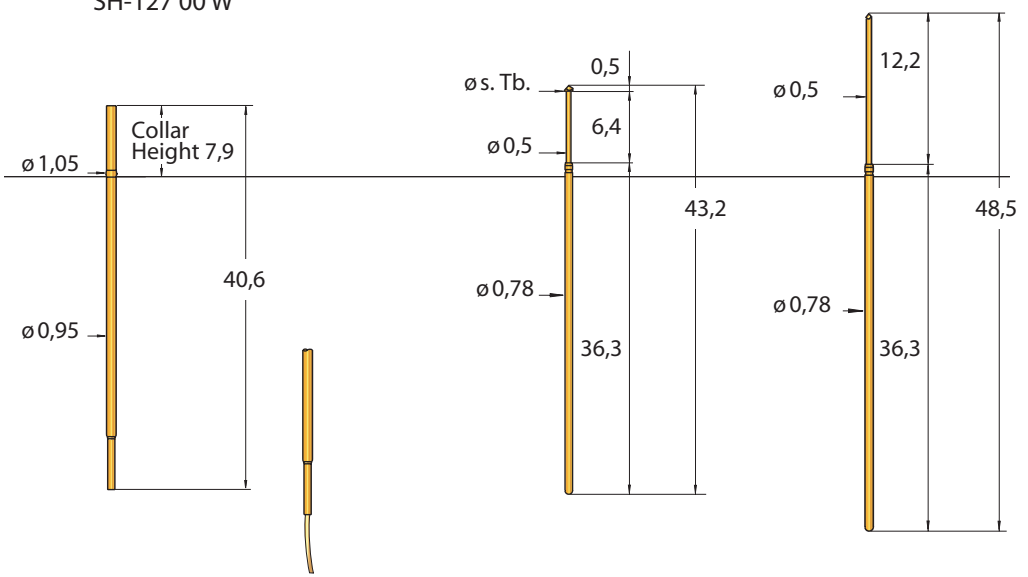




Figure	Type	∅(mm)	Electro- plating
	LA	0,50	A
	IK	0,50 0,90	A

Alternative Head shapes are available.

Sample Order:

Series	Head Shape	∅ Head	Electroplating	Lifting Height	Spring Pin	Collar Height
FS 254	FL	20	A	50	15	10

