

FS 060

Grid 0,7
Spring travel 3,5 mm

Technical Data

Minimum grid distance:	0,7 mm
Maximum spring travel:	3,5 mm
Recommended lifting height:	80%
Spring force at 4/5 spring travel:	0,4 N
E-value (collar height) defines the installation height	2 mm
Rated current:	2 A
Contact resistance:	50 mΩ
Pin housing:	Nickel-Silver, gold-plated
Barrel:	Brass, gold-plated
Spring:	Steel, gold-plated
Piston:	BeCu, gold-plated

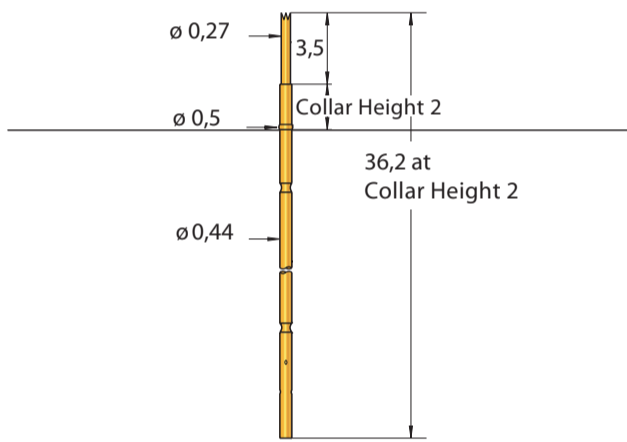



Figure	Type	Ø(mm)	Electro- plating
	KR	0,27	A

Alternative Head shapes are available.

Sample Order:

Series	Head Shape	Ø Head	Electroplating	Lifting Height	Spring Pin	Collar Height
FS 254	FL	20	A	50	15	10

