

PS 220

Grid 1,91
Spring travel 10,00 mm

Technical Data

Minimum grid distance:	1,91 mm
Maximum spring travel:	10,00 mm
Recommended lifting height:	80%
Spring force at 4/5 spring travel:	0,3 N
E-value (collar height) defines the installation height	2 mm
Rated current:	1-2 A
Contact resistance:	30 mΩ
Pin housing:	Brass, gold-plated
Barrel:	Brass, gold-plated
Spring:	Steel, gold-plated
Piston:	Steel, gold-plated



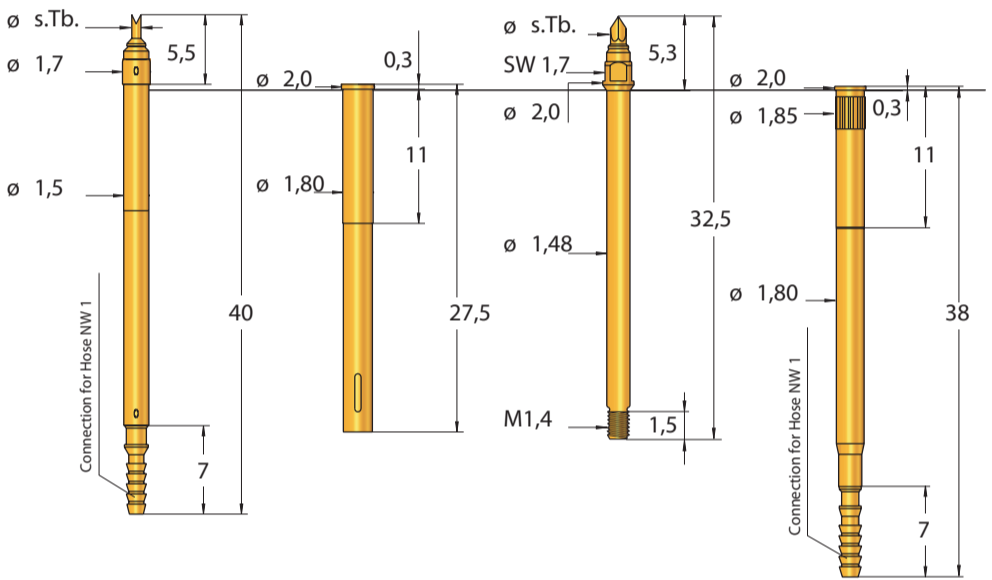



Figure	Type	ø(mm)	Electro- plating
	KR	0,50 1,00	A A
	IK	1,50	A
	LA	1,00	A

Alternative Head shapes are available.

Sample Order:

Series	Head Shape	Ø Head	Electroplating	Lifting Height	Spring Pin	Collar Height
FS 254	FL	20	A	50	15	10

